




Balearm closer

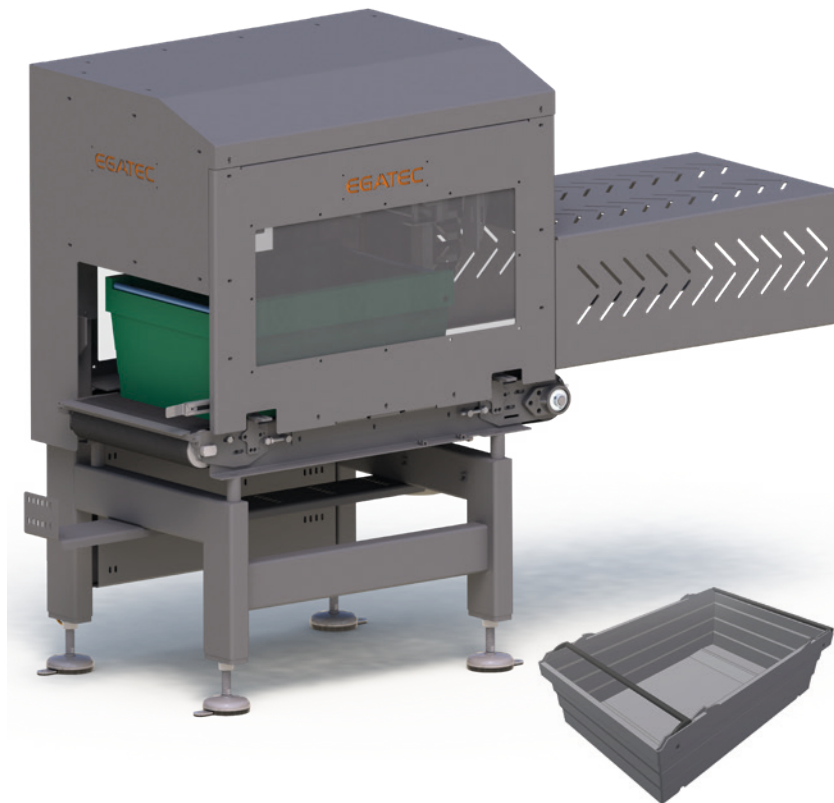

FEATURES

EGAbalearm closer closes all types of balearms on nested trays, srs crates, balearm trays and similar. The solutions uses a combination of pneumatic and servo drive to ensure a precise closing of all tray types.

- Dimensions, inlet and outlet can be customized. Small footprint
- Can be delivered as a single machine or mounted on existing equipment.
- Fast automatic changeover system with either adjustable rails or format tool
- Painted mild steel or stainless steel
- Either standalone unit with HMI and PLC or as part of bigger line control
- Machine components from renowned brands- worldwide availability
- Safe, robust, reliable and environment friendly solution
- Remote access and service available - Ready for industry 4.0



SPECIFICATIONS

Dimensions	(L x W x H) 1800 x 700 x 1300 mm (Depending on application)
Weight	Approx. 200 kg
Box types	Customizable for all standard balearm trays
Changeover time	Less than 5 minutes
Capacity	Up to 18 boxes/minute with high speed configuration

